


## PCU6-10CC-0150-W PATCH CABLE CAT.6

**HD-PE INSULATION** 

LD-PE CROSS

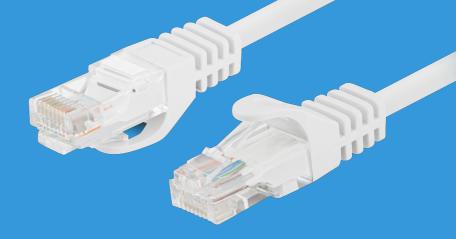

## **PRODUCT FEATURES:**

- Cable without shielding U/UTP
- Category compliance confirmed by Fluke tester
- Stranded wires made from CCA

## **PRODUCT SPECIFICATION:**

Cable length	150 cm
ICT category	Cat. 6
Shielding type	U/UTP
Colour	White
AWG	26
Coating	PVC
External lagging	5,4 mm
Maximum operating frequency	up to 250 MHz
Material	Copper plated (CCA)

