


FA01-8042-23B

# 19" RACK INSTALLATION CABINET

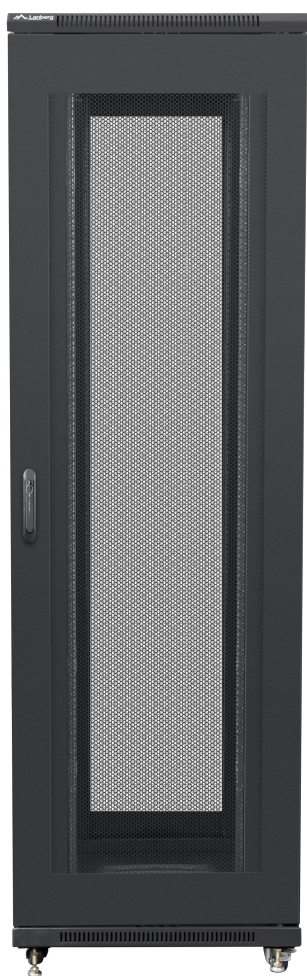

## PRODUCT FEATURES:

- Made of high quality steel,
- Cable grommets in the upper bottom panel,
- Numbered vertical mounting rails,
- Includes two vertical cable organizers, ventilation panel,
- Cabinet assembled, ready to use.

## PRODUCT SPECIFICATION:

Type of cabinet	Free standing
Size	19"
ICT height	42 U
Working depth	860 mm
Front door type	Perforation
Rear door type	Perforation
Maximum front door opening angle	215 °
Maximum static load	800 kg
Thermostat	No
LCD panel	No
RAL color	RAL9004
Weatherproof rating	IP20
Front door thickness	1,5 mm
Upper & lower panel thickness	1,2 mm
Side panel thickness	1 mm
Mounting rails thickness	2 mm
Frame thickness	1,2 mm
Other elements sheet thickness	1,2 mm
Depth	1 000 mm
Width	800 mm
Height	2 047,5 mm
Weight	121 kg
Standard	ANSI/EIA RS-310-D, DIN 41491/PART 1, DIN 41494/PART 7, ETSI, IEC297-2:1982
Grounding Details	Front door, Back door, Frame
Included Accessories	Wheels with brake, Grounding cable, Legs, Ventilation panel (4 fan's), Vertical cable management panel x2, M6 screws, Front lock, Rear lock, Side locks